



F SERIES

W4-656SC

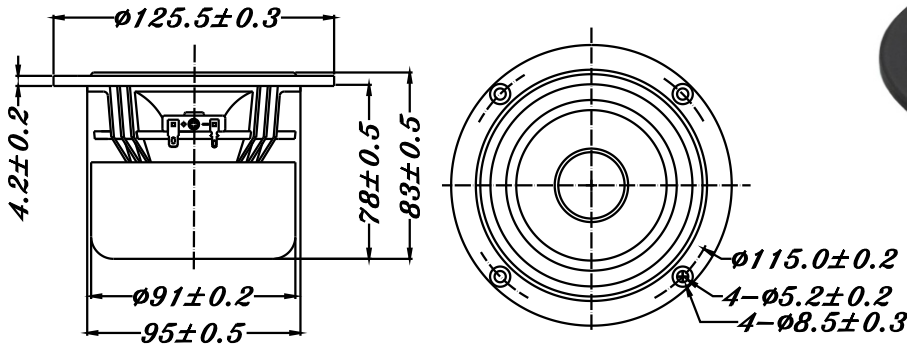

- FULL RANGE DESIGN
- HOME HI-FI, HOME THEATER, MID BASS APPLICATION
- DIE CAST BASKET
- PPM CONE WITH RUBBER SURROUND
- MAGNETICALLY SHIELDED
- CCAW WITH KAPTION BOBBIN

**4" PPM FULL RANGE,
WOOFER**

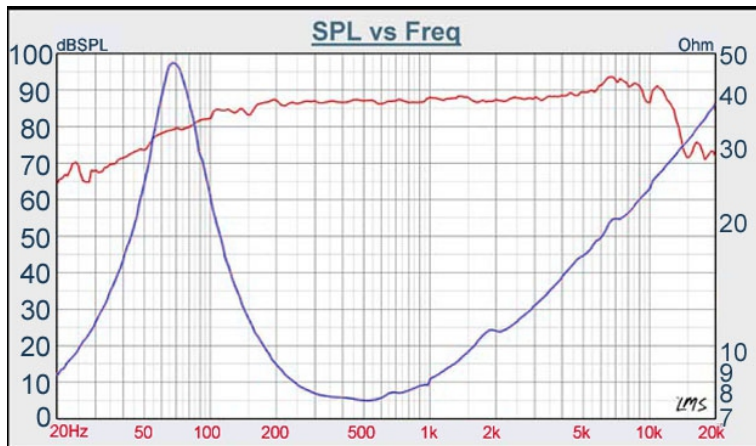

DIAPHRAGM MTL	Natural color PPM
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6 Ω
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	65 - 12K Hz
FREE AIR RESONANCE	65 Hz
VOICE COIL DIAMETER	25 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	5.24 TM
TYPE OF MAGNET	Ferrite
MOVING MASS	4.36 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1370 μMN^{-1}
EFFECTIVE PISTON AREA	0.0057 M ²
Levc	0.126 mH
Zo	40 Ω
X-max	3.4 mm
Vas	6.32 Litr
Qts	0.33
Qms	2.21
Qes	0.39

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com