



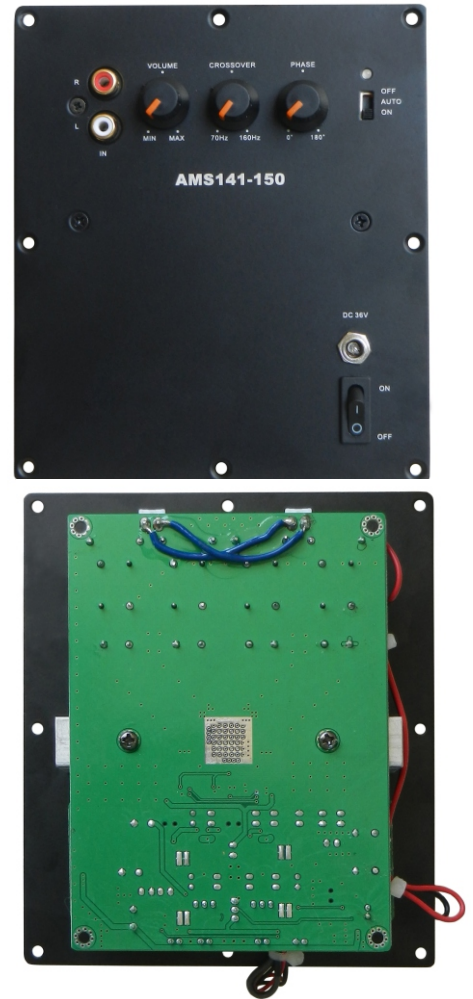

# AMS141-150

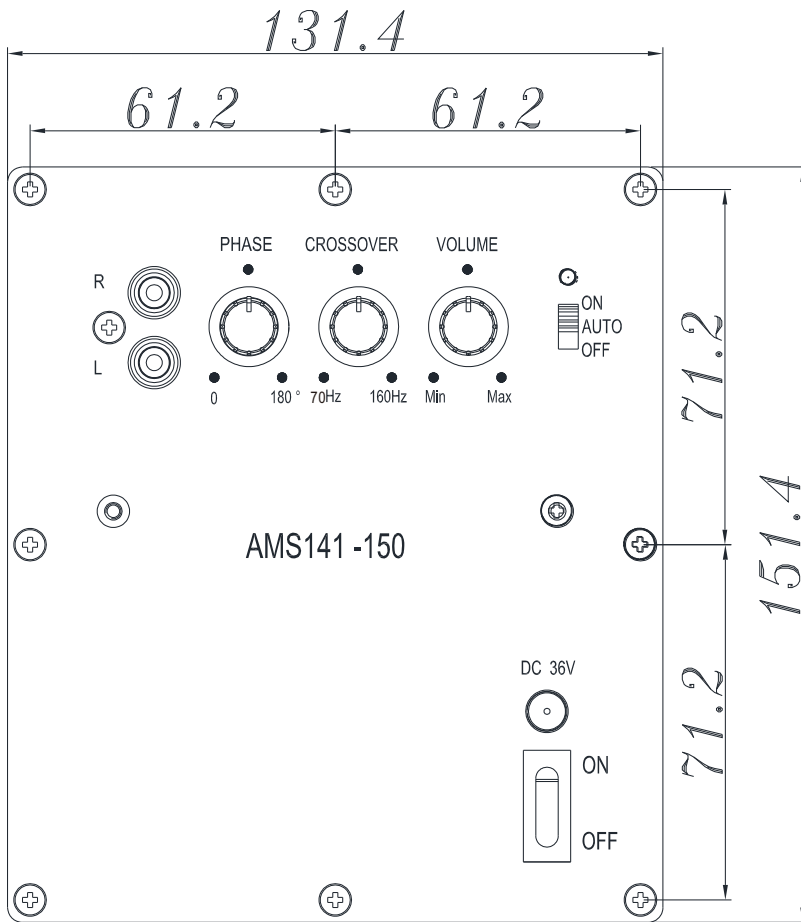

## Features

- CLASS-D AMPLIFIER
- WORKING VOLTAGE 36V / 5A, ADAPTER POWER SUPPLY RCA INPUT MODE
- RCA INPUT MODE
- ADJUSTABLE SOUND VOLUME, PHASE AND CROSSOVER POINT
- STAND BY MODE AVAILABLE

## Specification

- POWER OUTPUT 0.1%THD @ 8 ohm RMS : 100 WATTS
- POWER OUTPUT 0.1%THD @ 4 ohm RMS : 150 WATTS
- ADJUSTABLE RANGE: 40-160Hz
- THD : < 0.1%
- S/ N RATIO : > 98dB
- CROSSOVER CONTROL: 70Hz ~160Hz
- LINE INPUT SENSITIVITY : 350 mV
- POWER SOURCE : DC36 V/ 4A
- MAXIMUM POWER CONSUMPTION : 180 WATTS
- STAND BY POWER CONSUMPTION : < 10 WATTS
- DIMENSIONS (W x H x D)(mm) : 131.4 x 151.4 x 35