


# F SERIES


# W5-1611SA

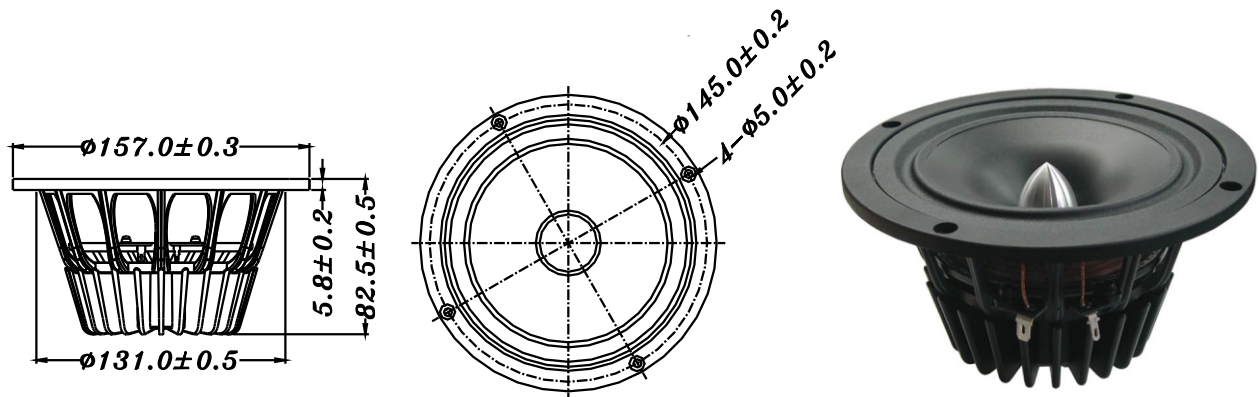

- FULL RANGE DESIGN
- BLACK COLOR PP CONE WITH WIDE RANGE TEMPERATURE, HIGH LOSS RECIPE OF RUBBER SURROUND
- VENTED POLE PIECE, NON-COMPROMISED UNDERHUNG NEODYMIUM MAGNET WITH ALUMINUM DIE CAST HEAT SINK
- GF REINFORCED NYLON BASKET

## 5" PP FULL RANGE

DIAPHRAGM MTL	Black color pp
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.8 Ω
SENSITIVITY 1W/1M	90 dB
FREQUENCY RESPONSE	60 - 20K Hz
FREE AIR RESONANCE	60 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	10 mm
RATED POWER INPUT	28 W
MAXIMUM POWER INPUT	56 W
FORCE FACTOR, BL	5.18 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	5.76 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1037 $\mu\text{MN}^{-1}$
EFFECTIVE PISTON AREA	0.0094 $\text{M}^2$
Levc	0.011 mh
Zo	32 Ω
X-max	3 mm
Vas	13.02 Litr
Qts	0.44
Qms	1.67
Qes	0.60

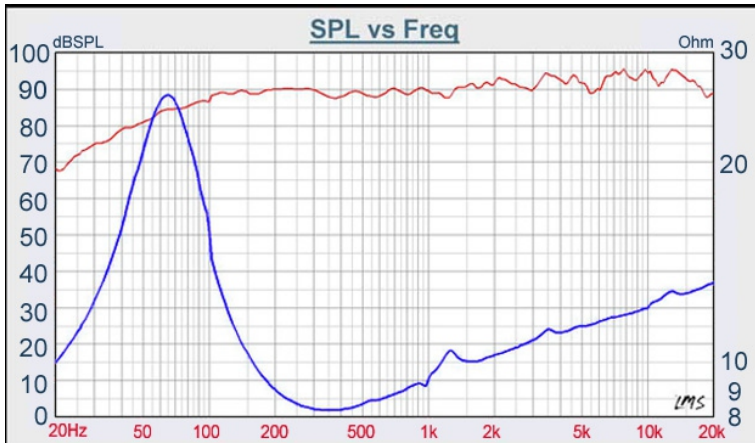

# TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166  
E-MAIL: info@tb-speaker.com