



SU SERIES

W3-1750SB

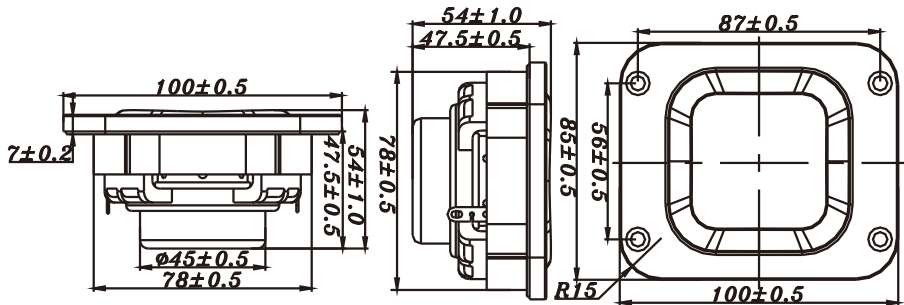

- REAL BALANCE MODE , PATENTED STRUCTURE
- THE HIGHEST STABILITY AND CONSISTENCY QUALITY
- NEW MATERIAL APPLIED AND MODE BY INJECTION PROCESS
- 32mm OF VC, LONG THROW($X_{max}=5\text{mm}$), HIGH POWER LOADING , GOOD FOR SMALL SUBWOOFER DESIGN
- NEODYMIUM MAGNET, SHIELDED
- SQUARE DIAPHRAGM TO MAXIMIZE THE EFLECTIVE

3" SUBWOOFER

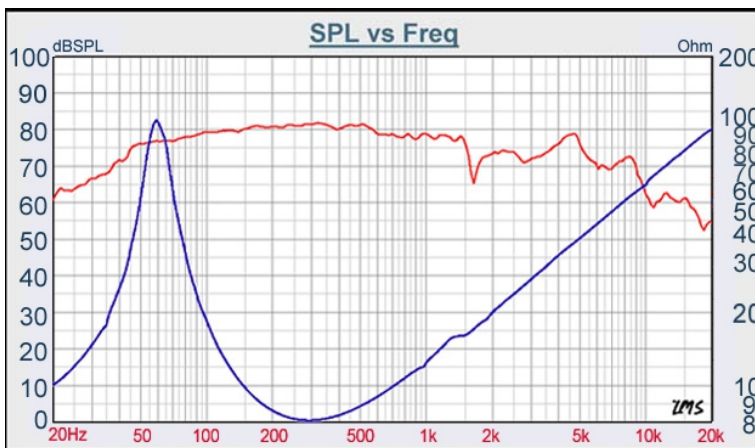

DIAPHRAGM MTL	PP
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.7 Ω
SENSITIVITY 1W/1M	80 dB
FREQUENCY RESPONSE	50 - 800 Hz
FREE AIR RESONANCE	50 Hz
VOICE COIL DIAMETER	32 mm
AIR GAP HEIGHT	4 mm
RATED POWER INPUT	20 W
MAXIMUM POWER INPUT	40 W
FORCE FACTOR, BL	8.01 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	10.98 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	770.50 μMN^{-1}
EFFECTIVE PISTON AREA	0.0039 M^2
Levc	0.44 mH
Zo	95 Ω
Xmax	5 mm
Vas	1.66 Litr
Qts	0.37
Qms	5.43
Qes	0.39



VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com