


MODULE


T1-2121SD

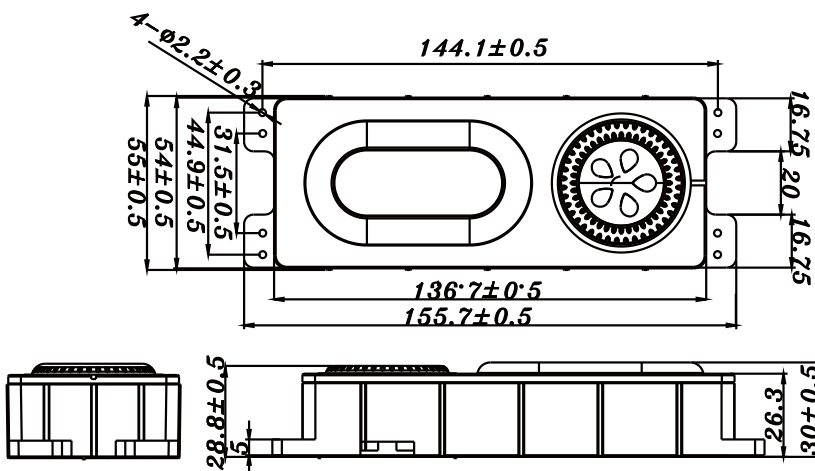

- COMPREHENSIVE SOLUTION FOR AUDIO DESIGN.
- COMBINE DRIVER, PASSIVE RADIATOR AND BOX AS ONE UNIT, PATENTED.
- SLIM AND TINY, LOW BASS $F_s = 78$ Hz.
- MODULE COULD BE RESHAPED TO FIT CUSTOMER'S APPLICATION.
- GOOD FOR PORTABLE, SOUNDBAR, MULTIMEDIA... APPLICATION.

SYSTEM SPECIFICATION

SYSTEM	Passive radiator design
ACTIVE DRIVER	46mm inverted shape driver
DIAPHRAGM	Alum. composite with elastomer
HOUSING	PP composite material
FINISH	Black
DIMENSIONS	155.7 x 55 x 30 mm
VOICE COIL DIAMETER	28 mm
IMPEDANCE	4 ohm
POWER LOADING	6 W (RMS)
MUSIC POWER	12 W
RESPONSE RANGE	78Hz - 20KHz
SENSITIVITY 1W / 1m	79 dB
F_s	78Hz
POWER RECOMMENDED	6 W (RMS)
DESIGN SUGGESTION	High pass filter with 87Hz, -12dB/oct

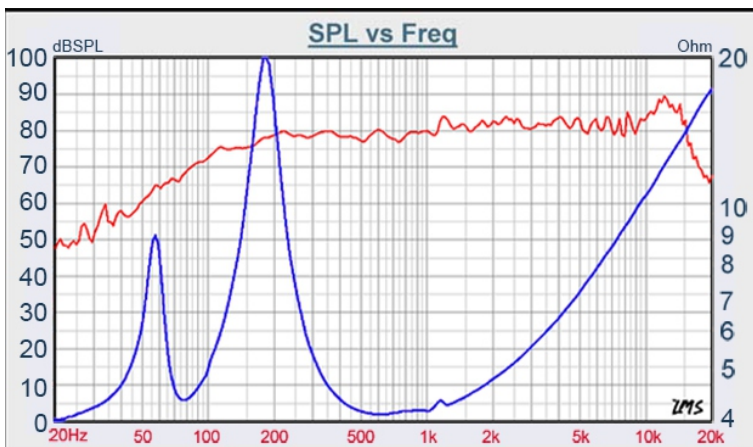

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com